




THE INNOVATOR IN HELICOPTER APPLICATION EQUIPMENT

2600-205 Versapplier

For Cargo Hook Equipped Helicopters capable of 2200 lb. External Loads

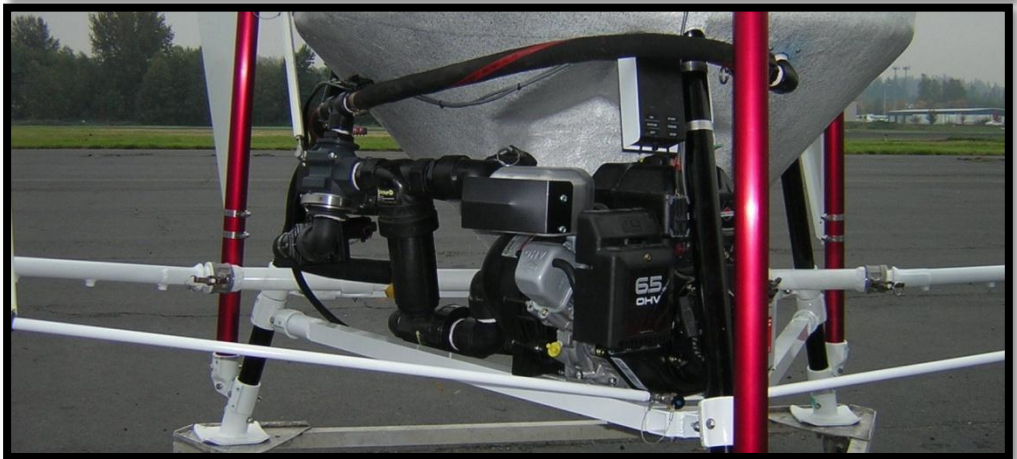

System Components

- **Hopper:** Durable fiberglass construction
- **Frame and Hardware:** Epoxy coated aluminum support structure with stainless steel hardware for corrosion resistance.
- **Boom Assembly:** Booms can be rotated for desired nozzle position relative to airflow across orifices.
- **Cyclic Control:** Allows pilot control of pump, boom valve, flow control and operation of gasoline engine.
- **Boom Valves:** Electric motor-driven, provides negative pressure on boom in OFF position.
- **Power Supply:** Standard 6.5 HP 4-cycle gasoline engine (optional 24VDC electric motor powered by helicopter).

Specifications

- **Net Weight:** 265 lbs.
 - **Gross Weight:** 2265 lbs.
 - **System Capacity:** 250 gallons
 - **Standard Power:** 6.5 HP gasoline
 - **Optional Power:** 24VDC
 - **Pump Capacity:** 200 GPM
 - **Boom Span:** 30 feet
 - **Spray Width:** 15-100 feet
 - **Nozzle Holes:** 58 total
- Optional hopper sizes, motors and pumps available.
Contact ISOLAIR for special applications.

