




**THE INNOVATOR IN HELICOPTER  
APPLICATION EQUIPMENT**

# **2600-45G Dryslinger II**

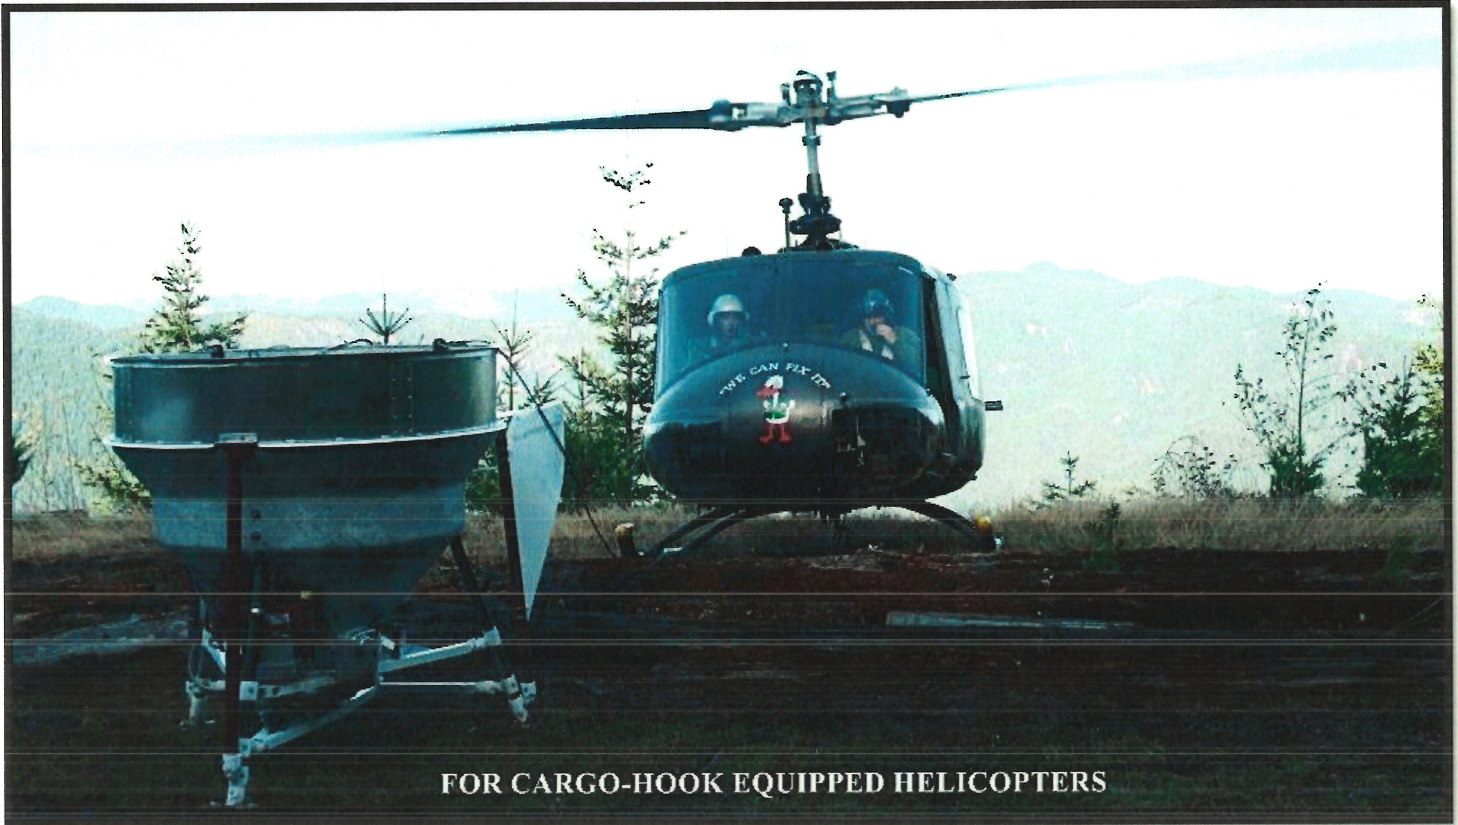

**FOR CARGO-HOOK EQUIPPED HELICOPTERS**

## **Specifications**

- **45 Cubic Foot Capacity:** Fiberglass and aluminum hopper for light weight and extreme durability.
  - **Flow Rate:** adjustable rate ranging from .5 to 600+ pounds per acre.
  - **Cyclic Control:** allows for complete pilot control of unit including product monitoring.
  - **22" Open Spinner:** eliminates clogging, spreads product fast and accurately.
  - **Directional Fins:** prevents rotation or spinning of bucket during flight.
- **18HP Gasoline Engine:** Electric start Briggs & Stratton with easy to find replacement parts.
- **22' Support Cables:** Includes Spreader Bar Assembly and non-twisting attachments.
  - **Optional Bucket Cover:** Heavy Duty nylon cover with easy-fill opening.
- **Optional Load Bag:** 45 cubic foot load bag and load cell capable of fast and accurate filling in the field.



27600 SE Highway 212, Boring, OR 97009 • (503) 492-2105 • [sales@isolairinc.com](mailto:sales@isolairinc.com) • [www.isolairinc.com](http://www.isolairinc.com)